



“my  
Reference,”

CREATION 70

CLIC

**Gerflor**<sup>®</sup>  
theflooringgroup




# CREATION 70

CLIC

214 x 1239 mm

242 x 1461 mm

391 x 729 mm



## PUR+ MATT



Easy maintenance

## 4D DESIGN

### MATT SURFACE




Natural look

### CRISTAL WEAR LAYER



High definition design & color

### STRUCTURED EMOSS & BEVEL



Ultra realistic surface

### 2M PATTERN DESIGN

Wide variety of planks or tiles

## DUO CORE TECHNOLOGY

### 1 RESILIENT COMFORT CORE



Noise absorption



Soft underfoot

### 2 RIGID CORE WITH FIBER GLASS VEIL



The best stability



No adhesive




Renovation ceramic 4 mm joint

## CLIC REVOLUTION 100% VERTICAL



30% Faster



Durable clic system



Heavy load resistance



Waterproof joints



Easy to change a plank

# CLIC REVOLUTION EASY TO INSTALL WITH 100% VERTICAL CLIC



**30% faster** 

**Waterproof joints**



**Easy to change a plank**



**Heavy load resistance**



BREAK  
**120 000**  
CYCLES

CLIC  
REVOLUTION

**5X**  
MORE  
RESISTANT!




BREAK  
**25 000**  
CYCLES

COMPETITOR A



Castor Chair Test

**Durable clic system**



CLIC  
REVOLUTION

**5X** MORE  
RESISTANT!








COMPETITORS



Locking Strength Test

# CREATION 70

## ONE SOLUTION FOR EVERY MARKET APPLICATION

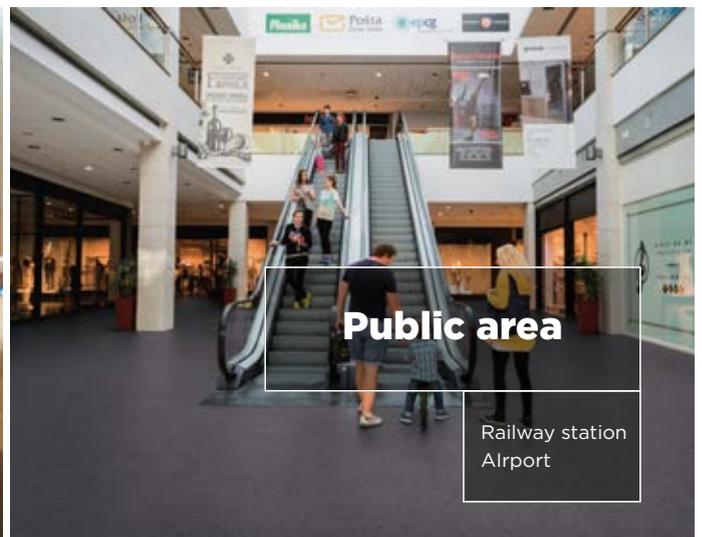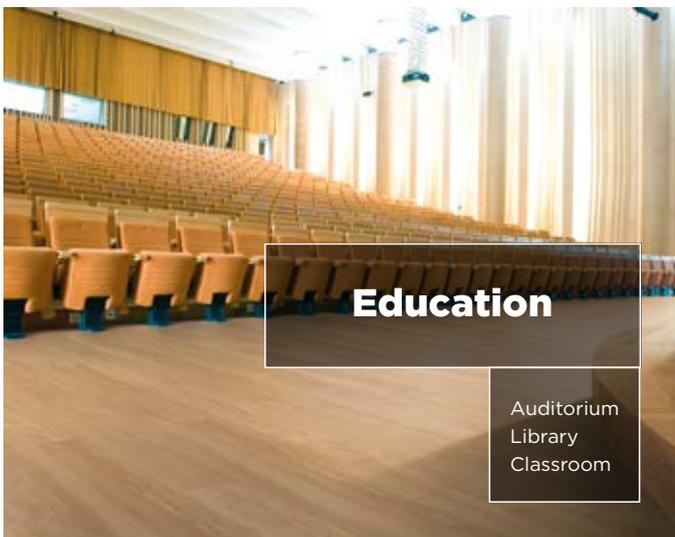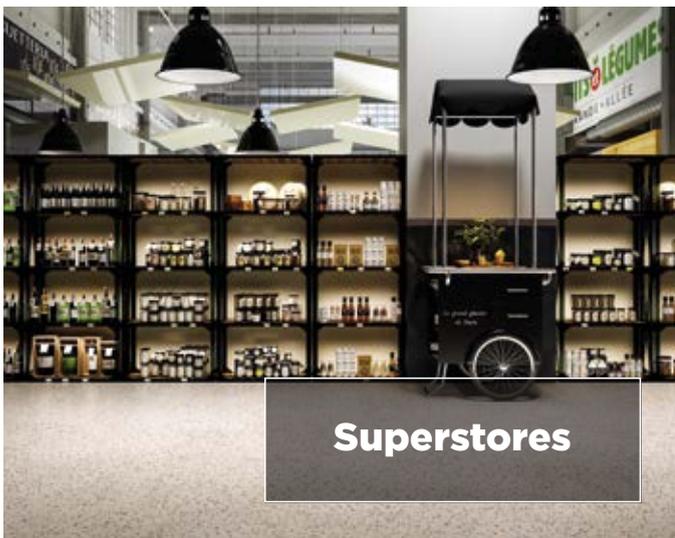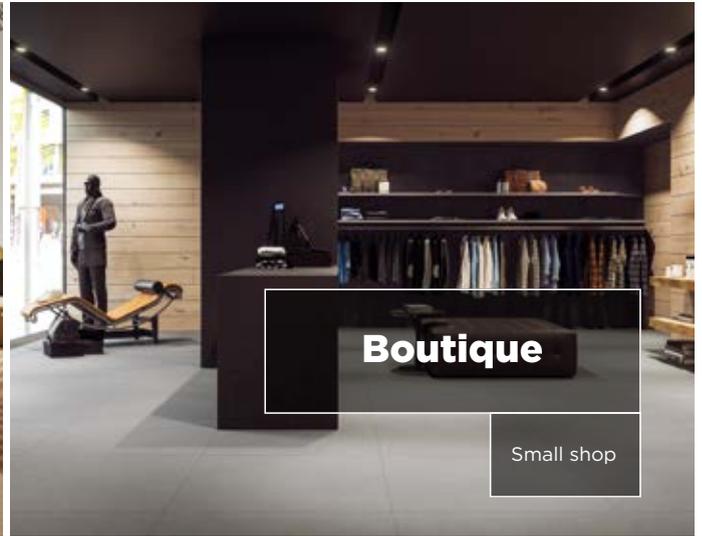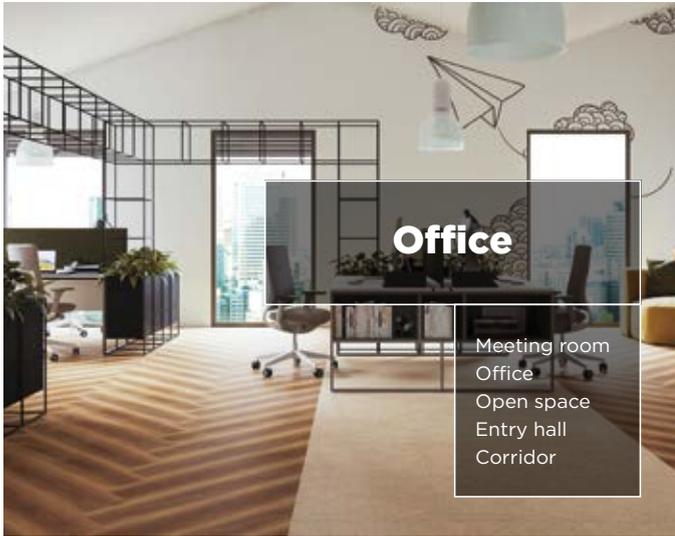

# CREATION 70

## 3 CONSTRUCTIONS TO MATCH YOUR NEEDS


**GLUE DOWN**  
2.5 mm / 0.7 mm



Permanent adhesive installation



Ideal installation on new construction & heavy refurbishment



Mix & match



XL planks

**70 DESIGN COLORS**

**CLIC - REVOLUTION**  
6 mm / 0.7 mm



Free adhesive installation



Fast and easy renovation  
Ceramic joint < 4 mm / 1 mm



Replacement one plank or tile



Watertight joint



Acoustic underlay



XL planks

**36 DESIGN COLORS**

**LOOSELAY**  
6 mm / 0.7 mm



Removable installation using pressure sensitive adhesive




Fast and easy renovation  
Ceramic joint < 5 mm / 2 mm



Replacement one plank or tile



Ideal installation on raised access floors



Mix & match



XL square tile

**21 DESIGN COLORS**

CREATION 70 CLIC  
EXCLUSIVE DESIGNS




1049 Grace Bay Cream

214x1239 mm



0797 Cervino Oak Beige

242x1461 mm

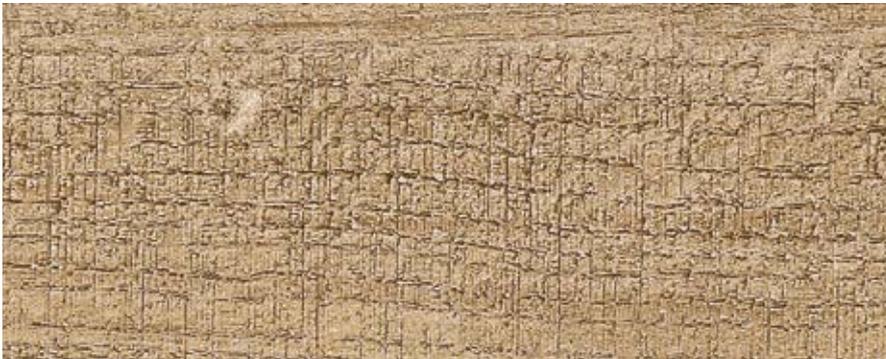

0798 Cervino Oak Nature

242x1461 mm



1052 Muse Sand

214x1239 mm



GRACE BAY CREAM



ONKA NATURAL





1055 Onka Natural

242x1461 mm



1054 Onka Honey

242x1461 mm



0577 Albion

214x1239 mm



0359 Wild Oak

214x1239 mm



CREATION 70 CLIC  
EXCLUSIVE DESIGNS



0538 Midwest

214x1239 mm



0358 Moon Island

214x1239 mm



0357 Portobello

214x1239 mm



0360 Deep Forest

214x1239 mm





0545 Serena

214x1239 mm



0800 Toasted Wood Roadster

242x1461 mm



0799 Toasted Wood Cafe

242x1461 mm




1057 Onka Coffee

242x1461 mm



CREATION 70 CLIC  
EXCLUSIVE DESIGNS

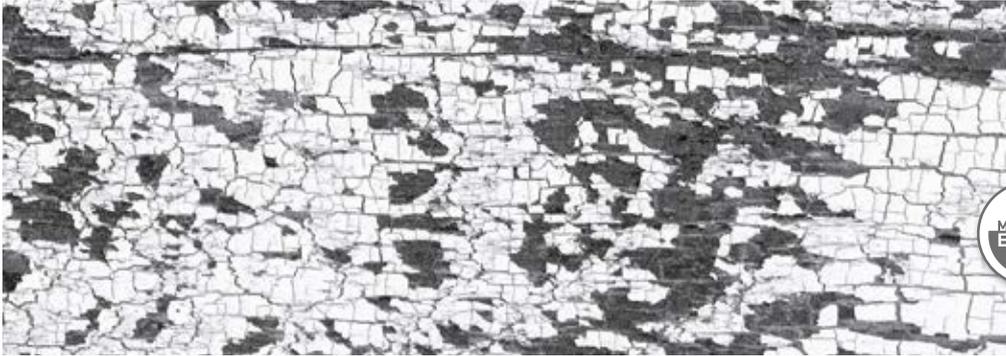

1050 Grace Bay Black

214x1239 mm



1056 Onka Pearl

242x1461 mm



1051 Muse Smoked

214x1239 mm



1053 Toasted Wood Ash

242x1461 mm



GRACE BAY BLACK



ONKA PEARL



Light




Medium



High



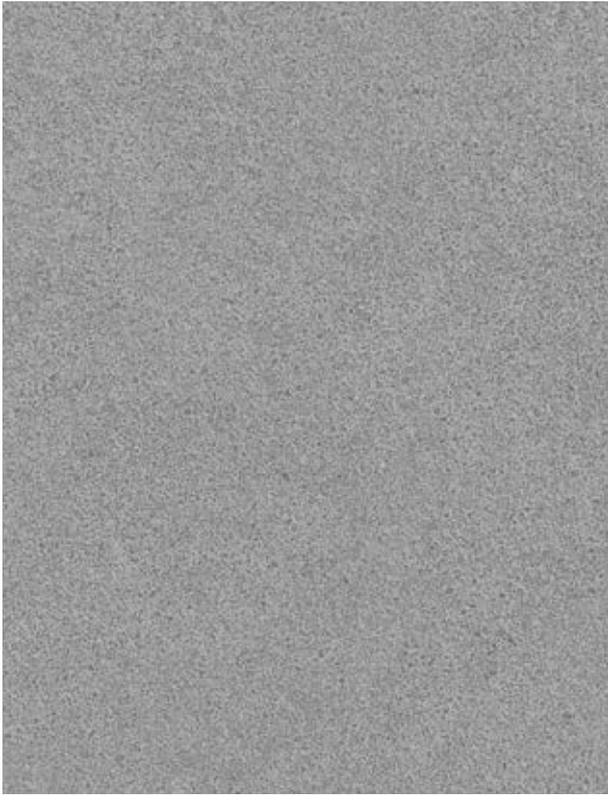

1061 Pure Concrete Medium

391x729 mm




1058 Gentleman Grey

391x729 mm



0085 Dock Grey

391x729 mm

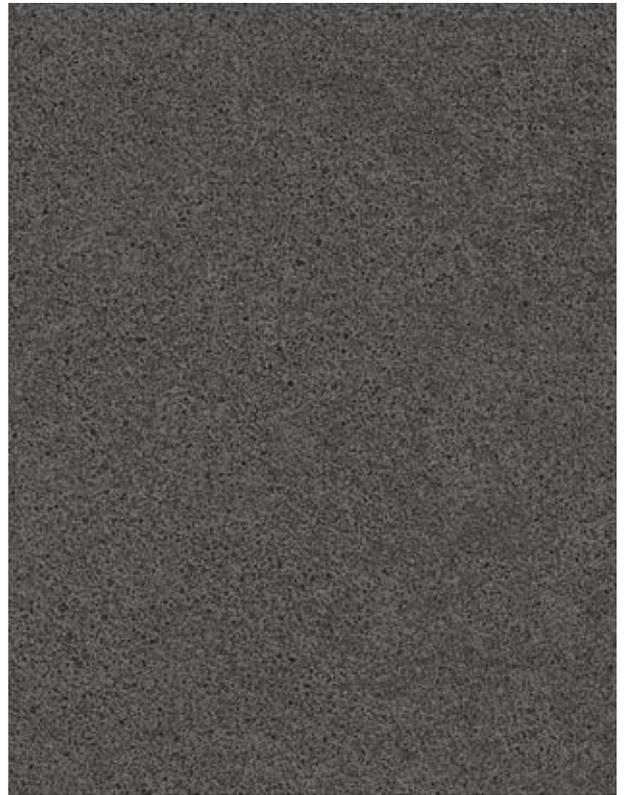

1062 Pure Concrete Dark

391x729 mm





PURE CONCRETE MEDIUM



GENTLEMAN GREY



TERRAZZO OCRE





1066 Terrazzo Ocre

391x729 mm



1068 Etna Beige

391x729 mm



1063 Pure Concrete Beige

391x729 mm



0087 Dock Taupe

391x729 mm





1060 Pure Concrete Light

391x729 mm




1059 Secret Garden White

391x729 mm



1067 Terrazzo Nature

391x729 mm

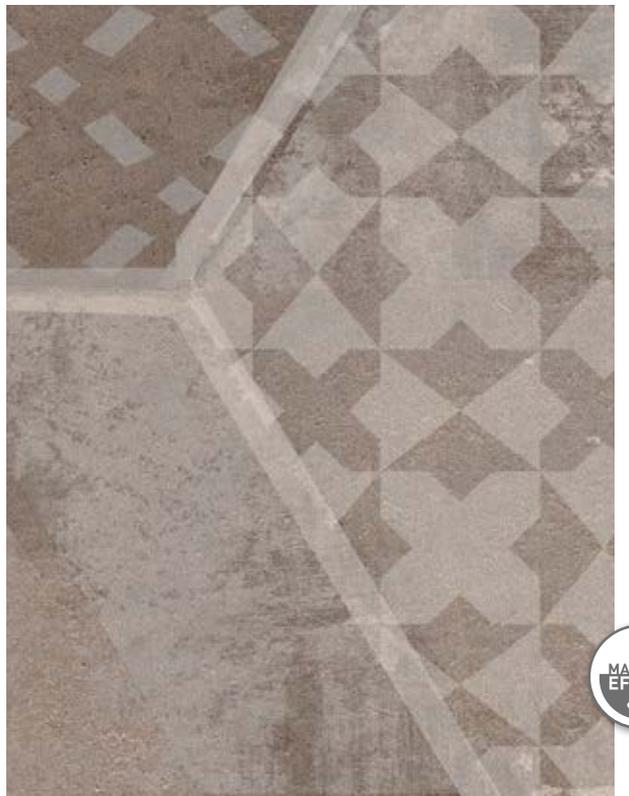

1065 Prado Terracotta

391x729 mm





SECRET GARDEN WHITE



PRADO TERRACOTTA



OXYD PURE / OXYD IRON




CREATION 70 CLIC  
EXCLUSIVE DESIGNS



0088 Oxyd Pure

391x729 mm

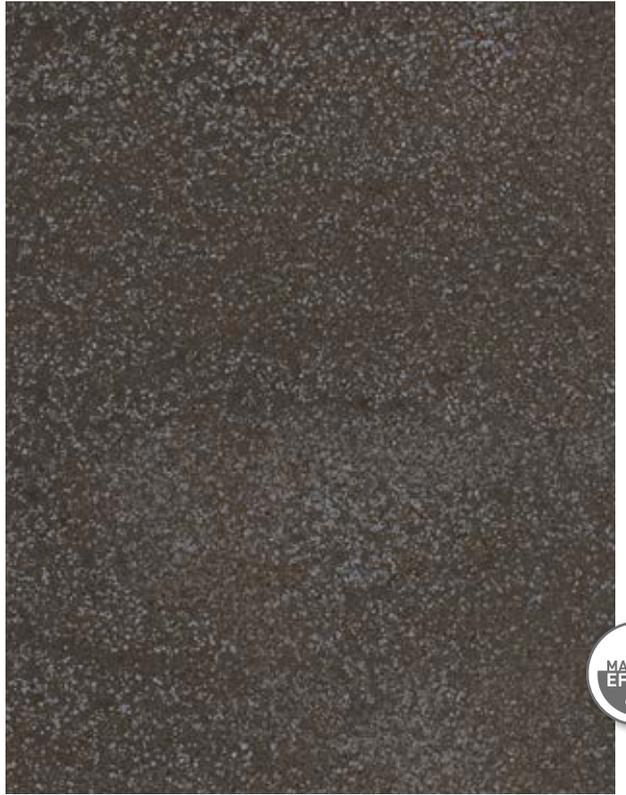

0089 Oxyd Iron

391x729 mm



1064 Prado Green

391x729 mm



1069 Etna Dark

391x729 mm

DESIGN SHADE VARIATION:  Light  Medium  High






OXYD IRON



MIDWEST



**PROFILES**




**RAMP 5-6MM**  
(aluminium)  
Ref. 0505




**FLAT THRESHOLD\***  
(aluminium)  
Ref. 2570

**DESIGN SKIRTINGS**




Ref. 6086 + Color code  
(Vinyl)



Ref. 5947 + Color code  
(MDF)

**COVERING SKIRTING**



Ref. 2550\*  
(MDF)

White to paint or  
matching design page 26



**MATTING**

**MATTING**

--- 2 TRAFFIC LEVELS --->



**QUICK MAT TILE**

Ref. 1725 + 1726 + 1727



**KIT ESPLANADE 9000**

Ref. 1700

----->

Suitable with Creation 70 Clic and Looselay

**TOOLS**



**ADD-ON UNDERLAYERS**



**FOR MORE DETAILS**

visit [gerflor.com](http://gerflor.com)



LVT Finishes Brochure

# CREATION 70 CLIC

## CROSS REFERENCES

SCANS	COLOR DESIGN	CLIC INSTALLATION	LOOSELAY INSTALLATION	GLUE DOWN INSTALLATION	DESIGN SKIRTING MATCHING DESIGN
	<b>ALBION - 0577</b>	214x1239 mm		184x1371 mm	S108
	<b>CERVINO OAK BEIGE - 0797</b>	242x1461 mm		230x1500 mm	S011
	<b>CERVINO OAK NATURE - 0798</b>	242x1461 mm		230x1500 mm	S109
	<b>DEEP FOREST - 0360</b>	214x1239 mm		152x914 mm	S110
	<b>DOCK GREY - 0085</b>	391x729 mm	914x914 mm	457x914 mm	S111
	<b>DOCK TAUPE - 0087</b>	391x729 mm	914x914 mm	457x914 mm	S020
	<b>ETNA BEIGE - 1068</b>	391x729 mm			WHITE
	<b>ETNA DARK - 1069</b>	391x729 mm			WHITE
	<b>GENTLEMAN GREY - 1058</b>	391x729 mm	600x600 mm		WHITE
	<b>GRACE BAY BLACK - 1050</b>	214x1239 mm			WHITE
	<b>GRACE BAY CREAM - 1049</b>	214x1239 mm			WHITE
	<b>MIDWEST - 0538</b>	214x1239 mm	229x1220 mm	152x914 mm	S039
	<b>MOON ISLAND - 0358</b>	214x1239 mm	229x1220 mm	152x914 mm	S034
	<b>MUSE SAND - 1052</b>	214x1239 mm			S117
	<b>MUSE SMOKED - 1051</b>	214x1239 mm			S118
	<b>ONKA COFFEE - 1057</b>	242x1461 mm			WHITE
	<b>ONKA HONEY - 1054</b>	242x1461 mm	229x1220 mm		S121
	<b>ONKA NATURAL - 1055</b>	242x1461 mm			S122
	<b>ONKA PEARL - 1056</b>	242x1461 mm			S120
	<b>OXYD IRON - 0089</b>	391x729 mm		457x914 mm	WHITE
	<b>OXYD PURE - 0088</b>	391x729 mm		457x914 mm	WHITE
	<b>PORTOBELLO - 0357</b>	214x1239 mm	229x1220 mm	152x914 mm	S053
	<b>PRADO GREEN - 1064</b>	391x729 mm			WHITE
	<b>PRADO TERRACOTTA - 1065</b>	391x729 mm			WHITE
	<b>PURE CONCRETE BEIGE - 1063</b>	391x729 mm			WHITE
	<b>PURE CONCRETE DARK - 1062</b>	391x729 mm	914x914 mm		WHITE
	<b>PURE CONCRETE LIGHT - 1060</b>	391x729 mm	914x914 mm		WHITE
	<b>PURE CONCRETE MEDIUM - 1061</b>	391x729 mm	914x914 mm		WHITE
	<b>SECRET GARDEN WHITE - 1059</b>	391x729 mm			WHITE
	<b>SERENA - 0545</b>	214x1239 mm		152x914 mm	S132
	<b>TERRAZZO NATURE - 1067</b>	391x729 mm			WHITE
	<b>TERRAZZO OCRE - 1066</b>	391x729 mm			WHITE
	<b>TOASTED WOOD ASH - 1053</b>	242x1461 mm			WHITE
	<b>TOASTED WOOD CAFE - 0799</b>	242x1461 mm		230x1500 mm	WHITE
	<b>TOASTED WOOD ROADSTER - 0800</b>	242x1461 mm		230x1500 mm	WHITE
	<b>WILD OAK - 0359</b>	214x1239 mm		152x914 mm	S075

WHITE = S001

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale	EN ISO 24346	mm	6.00		
	ASTM F386-02	inch	0.24		
Thickness of the wearlayer / Dicke der Nutzschrift / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura	EN ISO 24340	mm	0.70		
	ASTM F410-02	inch	0.03		
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997	g/m <sup>2</sup>	9850		
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensioe	ISO 24342	mm	214x1239	242x1461	391x729
	ASTM F 536	inch	8.4"x48.7"	9.5"x57.5"	15.3"x28.7"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582		
	ASTM F 1700-04	-	Class III Type B		
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874	Class	34 - 43		
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1		
Static Electrical Propensity / Begehafladung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2		
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida <sup>(1)</sup>	DIN 51130 / BGR 181	Class	R10		

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm <sup>3</sup>	≤ 2.0		
Wear Group / Verschleißgruppe / Groep slijtvasheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	QB 30	group	T		
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	ISO 10582	group	I		
Dimensional stability (norm) / Maßstabilität (norm) / Maatvastheid (norm) / Stabilité dimensionnelle (norme) / Estabilidad Dimensional (Exigencia) / Estabilidade dimensional (normalização) / Stabilità dimensionale (requisito normativo)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value) / Maßstabilität [Durchschnittswert] / Stabilité dimensionnelle (valeur moyenne mesurée) / Maatvastheid [gemeten gemiddelde waarde] / Estabilidad Dimensional (Valor medido) / Estabilidade Dimensional (Valor medio) / Stabilità dimensionale (rilevata)	-	%	≤ 0.05		
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1	mm	≤ 0.10		
Impact sound insulation / Trittschallverbesserungsmaß / Geluidisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	4		
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	78		
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed (Type W)	ISO 4918	-	OK		
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456	W/(m.K)	0.25		
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	> 6		
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie	-	-	PUR+ Matt		
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestandigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici <sup>(2)</sup>	EN ISO 26987	-	OK		

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITÉ DE L'AIR INTÉRIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m <sup>3</sup>	< 10		
Certification / Zeugnis / Certification / Certificado / Certificação	-	-	Floorscore®		

CE MARKING / CE KENNZEICHNUNG / EG\_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

	EN 14041	-				
---	----------	---	---	---	---	---

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

## PACKAGING

Product size (mm)	Tiles-planks / Box	Sqm / Box	Box weight (kg)	Pallet sizes w x l (m)	Sqm / Pallet	Pallet weight (kg)
214 x 1239	6	1.59	15.91	0.80 x 1.30	85.86	874.80
242 x 1461	5	1.77	17.68	0.80 x 1.50	84.96	864
391 x 729	5	1.43	14.25	0.80 x 1.50	85.80	876

## CREATION 70 CLIC, A SUSTAINABLE CHOICE

 <p><b>REACH</b> COMPOSITION 100% REACH Phthalate Free (except recycled content)</p>	 <p><b>INDOOR AIR QUALITY</b> TVOC below detection level No Formaldehyde emission</p>	 <p><b>RECYCLABILITY</b> Recycled content 55% 100% Recyclable</p>	 <p><b>INSTALLATION</b> Clic: Adhesive free</p>	 <p><b>LCA</b> Clic: Lowest Carbon Footprint CO<sub>2</sub> emissions/sqm 10 times lower than standard process</p>	 <p><b>WELLNESS</b> Walking noise: 78 dB</p>
---	--	--	--	--	---

Visualize your reference



[interiordesigner.gerflor.com](http://interiordesigner.gerflor.com)

**30 years experience**  
Since 1985

**Manufacturer**  
3 LVT Factories

**World Class Logistics**  
12 Logistics Hubs

**Gerflor Design Centre**  
Exclusive Designs



**“Serenity,,**  
Elodie - **End User**



**“Time saving,,**  
Mika - **Installer**



**“Unique Design,,**  
Pierre - **Architect**



**“Confidence,,**  
Claire - **Store Manager**



**“Reliability,,**  
Lucas - **Distributor**

That's why Gerflor is our **Reference**

**Gerflor International**  
Tel: +33 (0)4 74 05 40 00  
Fax: +33 (0)4 74 05 03 13  
e-mail: [gerflorcontract@gerflor.com](mailto:gerflorcontract@gerflor.com)  
**gerflor.com**

**Gerflor**<sup>®</sup>  
theflooringgroup